



SINCE
BUILDING
THE BEST 1886



Brushed Nickel



White




Builder Select™







We packed all of Hunter's quality and durability into this compact performer. Because we believe smaller rooms also deserve a style all their own. Traditional styled ceiling fan in a compact design


- 24342 Brushed Nickel with five Grey/ Maple blades
- 24344 Antique Brass with five Dark Walnut/ Cherry blades
- 24346 White with five White/ Maple blades

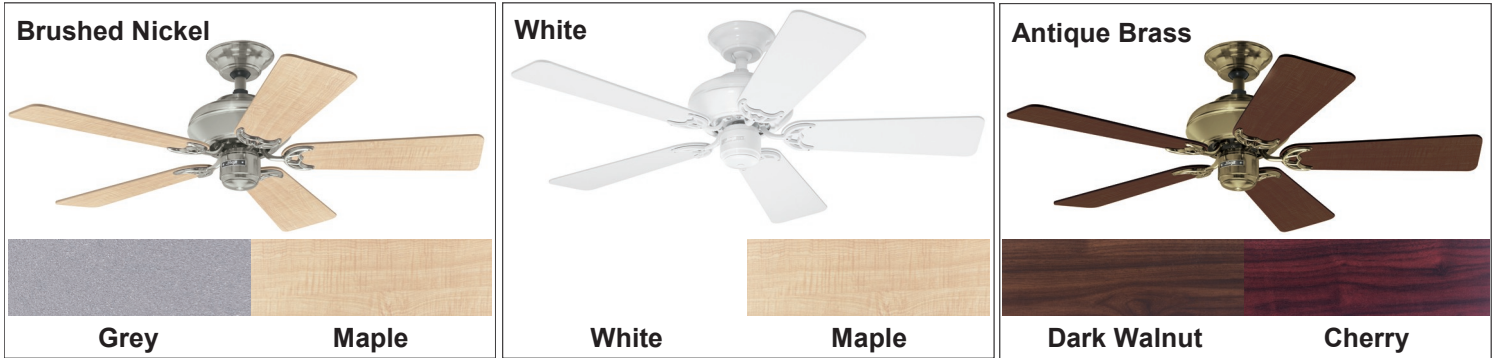

Builder Select™

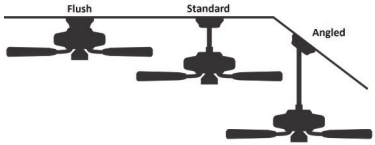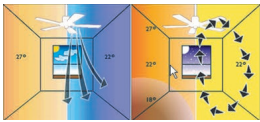

SIZE & BLADES:	107cm (42") Dia. from blade tip to blade tip.				
	Three reversible plywood blades. The blades are reversible with different finishes designed to compliment the motor colour.				
	10.4 Degree blade pitch.				
MOTOR:	Hunter's High Output motor. 16 pole. 153 x 12mm 60Watt motor with heavy gauge copper windings, silicon steel laminations, and precision sealed bearings, for quiet operation, year after year.				
CONTROLLER:		Supplied with pull chain for fan operation.			
		<ul style="list-style-type: none"> Suitable with Hunter wall controls. Not suitable for use with Hunter remote controls. (No cradle in canopy) 			
CANOPY:	Hunter's patented WobbleFree™ canopy with Anti Vibration Technology (AVT) Hunter's patented triangular hanger ball system reduces torque and gives Hunter fans the ability to self-balance, eliminating wobble for rock solid performance, year after year.				
LOCATION:	Indoor use only.				
MOUNTING:	Easy to install in one of 3 mounting positions: <ul style="list-style-type: none"> Flush mounting on flat ceilings. Standard mounting on flat ceilings. Angled mounting on raked ceilings up to 34-Deg. 				
LIGHT KIT:	Suitable for use with most Hunter light kits.				
FEATURES:	Reversing switch for both summer and winter operation. <ul style="list-style-type: none"> Save up to 47% on summer cooling costs, Save up to 24% on winter heating costs. 				
PERFORMANCE: <i>NB: Performance testing carried out in laboratory approved for energy star testing and certification</i>	SPEED	WATTAGE*	RPM	AIRFLOW ** (in M³/HR)	EFFICIENCY (in M³/HR/W)
	HIGH:	53.0	211	5,636	106.30
	MEDIUM:	35.0	180	4,762	136.10
	LOW:	17.4	125	3,116	179.10
	* Wattage for Energy Star data and is based on actual not rated value as shown on rating label ** Airflow data tested using Energy Star Solid State Method (Developed by Hunter Fan Company)				

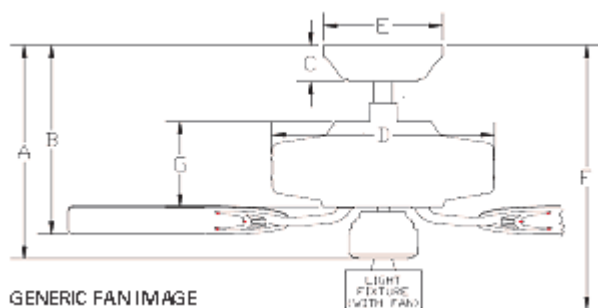

A	B	C	D	E	F	G
STANDARD MOUNT (cm) NB: Using standard downrod.						
36.20	30.78	8.26	23.57	15.75	-	11.43
FLUSH MOUNT (cm) NB: No downrod installed.						
29.01	23.60	8.26	23.57	15.75	-	11.43
ANGLED MOUNT (cm) NB: Using 91cm downrod.						
120.02	114.60	8.26	23.57	15.75	-	11.43