



White





MetroTM






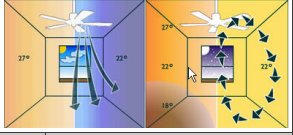
Sleek yet powerful, the Metro is designed to maximise air flow where continual performance and reliability is paramount. With two sets of reversible timber blades (44" & 52"), Metro is ideal for all room sizes.


- 24211 Brushed Nickel with three Maple/ Chocolate blades
- 24218 White with three White/ Maple blades

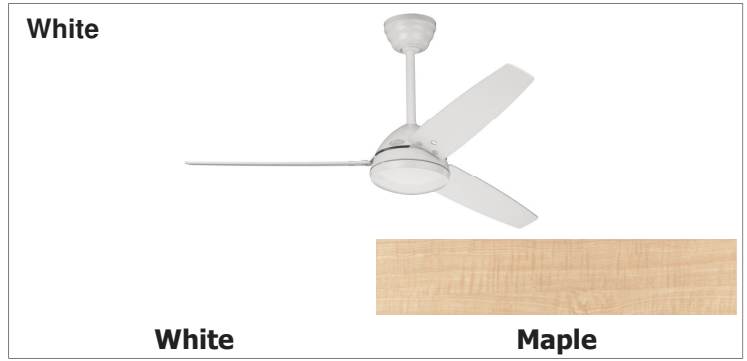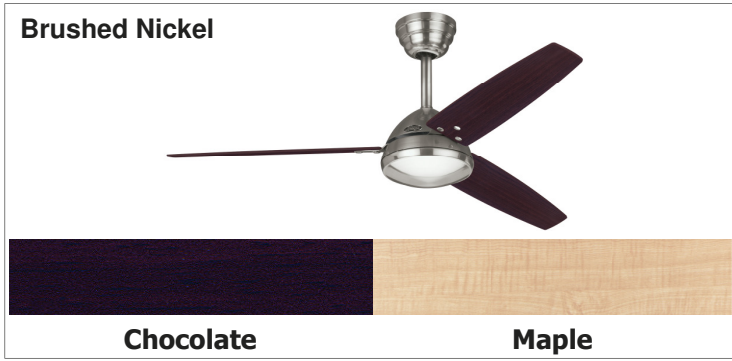

Metro™



SIZE & BLADES:	BOTH 112cm (44") Dia. from blade tip to blade tip & 132cm (52") Dia. from blade tip to blade tip.				
	Three reversible plywood blades. The blades are reversible with different finishes designed to compliment the motor colour.				
	18 Degree blade pitch.				
MOTOR:	Hunter's High Output Outdoor motor. 16 pole. 172 x 18mm 85Watt motor with heavy gauge copper windings, silicon steel laminations, and precision sealed bearings, for quiet operation, year after year.				
CONTROLLER:		Supplied with 3 speed wall control. • Suitable with Hunter remote controls.			
CANOPY:	Hunter's patented WobbleFree™ canopy with Anti Vibration Technology (AVT) Hunter's patented triangular hanger ball system reduces torque and gives Hunter fans the ability to self-balance, eliminating wobble for rock solid performance, year after year.				
LOCATION:	Indoor use only.				
MOUNTING:	Easy to install in one of 2 mounting positions: • Standard mounting on flat ceilings. • Angled mounting on raked ceilings up to 34-Deg.				
LIGHT KIT:	Suitable for use with Hunter Metro light kit only.				
FEATURES:	Reversing switch for both summer and winter operation. • Save up to 47% on summer cooling costs, • Save up to 24% on winter heating costs.				
PERFORMANCE: <i>NB: Performance testing carried out in laboratory approved for energy star testing and certification</i>	SPEED	WATTAGE*	RPM	AIRFLOW ** (in M³/HR)	EFFICIENCY (in M³/HR/W)
	HIGH:	62.3	165	9402	150.90
	MEDIUM:	40.0	128	7384	184.60
	LOW:	17.0	75	4280	251.80
* Wattage for Energy Star data and is based on actual not rated value as shown on rating label ** Airflow data tested using Energy Star Solid State Method (Developed by Hunter Fan Company)					

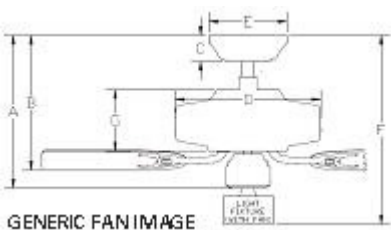

A	B	C	D	E	F	G
STANDARD MOUNT (cm)						
31.85	27.71	8.26	24.94	15.75	N/A	19.84
ANGLED MOUNT (cm) NB: Using 91cm downrod.						
108.05	103.91	8.26	24.94	15.75	N/A	19.84